


# Ease of use

## SNMP(pro) Adapter

### Communications add-on for UPS systems from AEG Power Solutions

Available in two versions, the SNMP adapter enables users to monitor the status of UPS units via the Web or WAP. It can also initiate a staggered shutdown of key servers if the need arises, and can restart the servers via wake-on-LAN, providing automatic system shutdown and reboot capabilities. In addition to these features, the adapter has an integrated RFC1628-compliant SNMP agent, allowing the UPS to be configured and monitored in HP OpenView, SunNet Manager or other network management software.

The PRO version of the SNMP adapter can additionally incorporate room access control, air-conditioning, and smoke and fire detector systems. In combination with the EnvironmentManager, the SNMP PRO Adapter is even capable of processing temperature and humidity sensor data.

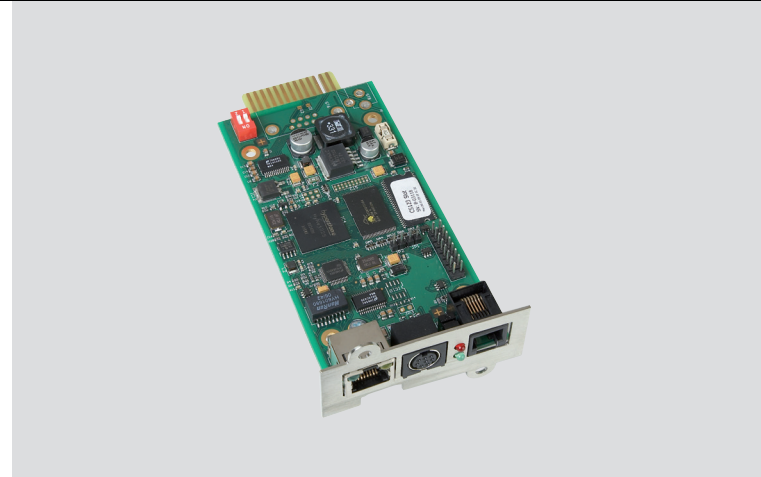

#### Key features:

- Event notification by e-mail, SMS text or network messages
- Status information can be viewed in web browser
- Automatic initiation of shutdown and reboot procedures over LAN
- Definition of time- and interrupt-driven events

### SNMP(pro) Adapter: Technical data

TECHNICAL DATA	SNMP-ADAPTER	SNMP-PRO-ADAPTER	SNMP-PRO-ADAPTER (EXTERNAL)
Compatibility	Protect B. (from B.1500) / C. / 1. / 1.M		all PROTECT series UPS units
Power supply	internal via UPS		power adapter
Adapter ports	1 x RJ45	1 x RJ45, 1 x Com 2, 1 x 10/100 Mbit Ethernet	1 x RJ45, 1 x Com 2, 1 x 10/100 Mbit Ethernet
Format	Slot card (internal)		external
Includes	Adapter, short user guide		Com cable, 12V power adapter
Dimensions (H x W x D)	60 mm x 44 mm x 120 mm		69 mm x 28 mm x 126mm
Weight	66 g		210 g
AEG part number	600 000 4036	600 0001271	800 000 9965

AEG is a registered trademark used under license from AB Electrolux • Specifications are subject to change without notice • 02/2009

AEG Power Solutions GmbH  
Emil-Siepmann-Str. 32  
59581 Warstein-Belecke  
Germany  
Tel.: +49 2902 763 168  
Fax: +49 2902 763 169  
www.aegpartnernet.com

PERFECT IN FORM AND FUNCTION

**AEG**